

# MB Ultra-low ESR, High Ripple Current

## 超低阻抗，高纹波

- Ultra-low ESR, Higher Capacitance, High ripple current.  
超低低阻抗，大容量，高纹波。
- Load life of 2000 hours at 105°C.  
105°C 负荷寿命 2000 小时。
- Available for high density surface mounting.  
适用于高密度表面组装。
- Lead free reflow soldering condition at 260°C peak correspondence.  
可适用于 260°C 高温无铅回流焊。



### ■ Specifications 特性表

Items 项目	Condition 测试条件	Characteristics 主要特性			
Rated Voltage Range 额定工作电压范围(V)	---	2.5 ~ 16V <sub>dc</sub>			
Category Temperature Range 使用温度范围(°C)	---	-55 ~ +105°C			
Capacitance Tolerance 静电容量允许偏差(%)	120Hz/20°C	±20% (M), at 20°C, 120Hz			
Dissipation Factor (Tanδ, DF) 损耗角正切值(%)	120Hz/20°C	Please see the attached characteristics list.			
Leakage Current (※1) 漏电流	Rated Voltage applied, after 2 minutes 施加额定电压 2 分钟后	Please see the attached characteristics list.			
Equivalent series resistance (ESR) 等效串联电阻 (※2)	100KHz to 300KHz/20°C	Please see the attached characteristics list.			
Temperature Characteristics (Max. Impedance Ratio) 高低温特性阻抗比	Based the value at 100KHz, +20°C 基于 20°C, 100KHz 值	-55°C +105°C	Z/Z20°C Z/Z105°C	Less than 1.25	
Endurance 耐久性	105°C, 2000h, Rated Voltage applied 施加额定电压	△C/C(※3)		Within ±20% of the initial capacitance value	
		DF		150% or less than the initial specified value	
		ESR		150% or less than the initial specified value	
		LC		less than or equal to the initial specified value	
Damp Heat (Steady State) 高温高湿	60°C, 90 to 95%RH, 1000h, No- applied Voltage 不施加电压	△C/C		Within ±20% of the initial capacitance value	
		DF		150% or less than the initial specified value	
		ESR		150% or less than the initial specified value	
		LC		less than or equal to the initial specified value	
Resistance to Soldering Heat 耐焊接热	Vapor Phase Soldering 回流焊 (230±5°C, 75S)	△C/C		Within ±10% of the initial capacitance value(※3)	
		DF		130% or less than the initial specified value	
		ESR		130% or less than the initial specified value	
		LC		less than or equal to the initial specified value	

※1 If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.


如果有任何疑问，可以在 105°C 温度下对产品施加额定电压 120 分钟后测试。

※2 ESR should be measured at both of the terminal ends closest where the terminals protrude through the plastic platform. ESR 测试时，请使测试点尽可能地靠近引线弯曲处。

※3 Initial value: The value before test of examination of resistance to soldering. 初始值：实验投入或焊接前的值

※4 Please refer to page 9 for flow soldering conditions. 请参照第 9 页的回流焊接条件

### ■ Drawing(Unit: mm) 外形图

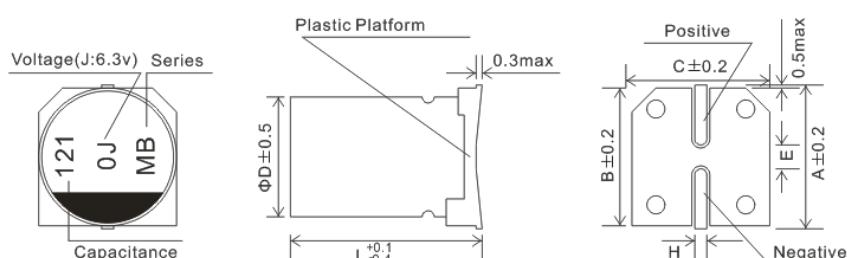

Size 尺寸	5x5.8	6.3x5.8	6.3x7.7	8x6.7	8x7.7
ΦD	5.0	6.3	6.3	8.0	8.0
L	5.7	5.7	7.6	6.6	7.6
A	6.0	7.3	7.3	9.0	9.0
B	5.3	6.6	6.6	8.3	8.3
C	5.3	6.6	6.6	8.3	8.3
E	1.6	2.1	2.1	3.2	3.2
H	0.5-0.8	0.5-0.8	0.5-0.8	0.8-1.1	0.8-1.1

### ■ Rated ripple current multipliers(Unit: mm) 额定纹波修正系数

Frequency 频率 (Hz)	120Hz≤f<1KHz	1KHz≤f<10KHz	10KHz≤f<100KHz	100KHz≤f<300K
Coefficient 系数	0.05	0.3	0.7	1.00

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, Please contact us immediately for technical assistance before purchase.

**注:** 以上所提供的设计及特性参数仅供参考，任何修改不作预先通知，如有使用上任何疑问，请在采购前与我们联系，以便提供技术上的协助。

# MB Series

## ■ Standard ratings 标准品一览表

Rated voltage 额定电压 (V)(code)	Surge Voltage 浪涌电压 (V)	Rated Cpacitance 额定容量 (μF)	Case Size 产品尺寸 ΦD x L(mm)	DF 损失角正切值 (DF,max)	Leakage Current 漏电流 (mA,max)	ESR(mΩ) (at 100kHz 20℃)	Rated Ripple 纹波电流 (mA,rms,at 105℃)
2.5 (0E)	2.8	330	5x5.8	0.12	700	10	3900
		390	5x5.8	0.12	700	10	3900
		390	6.3x5.8	0.12	292	10	3900
		470	6.3x7.7	0.12	352	9	4200
		560	6.3x5.8	0.12	700	10	3900
		560	6.3x7.7	0.12	420	9	4200
		560	6x6.7	0.12	420	10	4500
		680	6x6.7	0.12	510	10	4500
		1000	8x7.7	0.12	750	9	4500
4 (0G)	4.6	330	6.3x5.8	0.12	396	10	3900
		390	6.3x7.7	0.12	468	9	4200
		470	6x6.7	0.12	564	10	4500
		560	6x6.7	0.12	672	10	4500
		680	8x7.7	0.12	816	9	4500
		150	5x5.8	0.12	700	12	3500
		220	5x5.8	0.12	700	12	3500
		220	6.3x5.8	0.12	415	10	3900
		270	6.3x7.7	0.12	510	9	4200
		330	6.3x5.8	0.12	700	10	3900
		330	6.3x7.7	0.12	623	9	4200
		330	6x6.7	0.12	623	10	4500
		390	6x6.7	0.12	737	10	4500
		470	8x7.7	0.12	888	9	4500
		560	8x7.7	0.12	1050	9	4500
10 (1A)	11.5	120	5x5.8	0.12	240	22	2600
		270	6.3x5.8	0.12	540	20	2800
16 (1C)	18.4	180	6.3x5.8	0.12	576	22	3300
		270	8x6.7	0.12	864	22	3300
		330	8x7.7	0.12	1050	21	3400

Note1: Case size ΦD x L(mm), ripple current (mA, rms) at 105℃, 100KHz. 尺寸 ΦD x L(mm), 纹波电流於 105℃, 100KHz

Note2: Produce custom product too, which are not found in these tables. 客户定制品不在标准品一览表内